



ACCESS DOORS



Model 20-HAD

STANDARD CONSTRUCTION

FRAME:	22 GA. GALV. STEEL
DOOR PANEL:	26 GA. GALV. STEEL
FINISH:	GALV. STEEL


1" THICK HINGED ACCESS DOOR WITH FLANGE
 FRAME 22 GA. GALV. STEEL
 1" OUTBOARD FLANGE ALL(4) SIDES
 1/8" X 1-1/2" PRESSURE SENSITIVE FOAM TAPE (4) SIDES
 1/8" X 1/2" INSIDE DOOR SEAL

OPTIONS:


Finish: Aluminum, powder coat or stainless steel

MODEL:
20-HAD
25-CAD


Standard models are 1" thick hinged or double cam lock insulated doors.



MODEL 20 (HAD)
 Hinged 1" access door with insulation

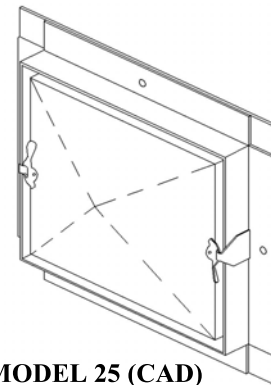

MODEL 25 (CAD)
 Double cam 1" access door with insulation

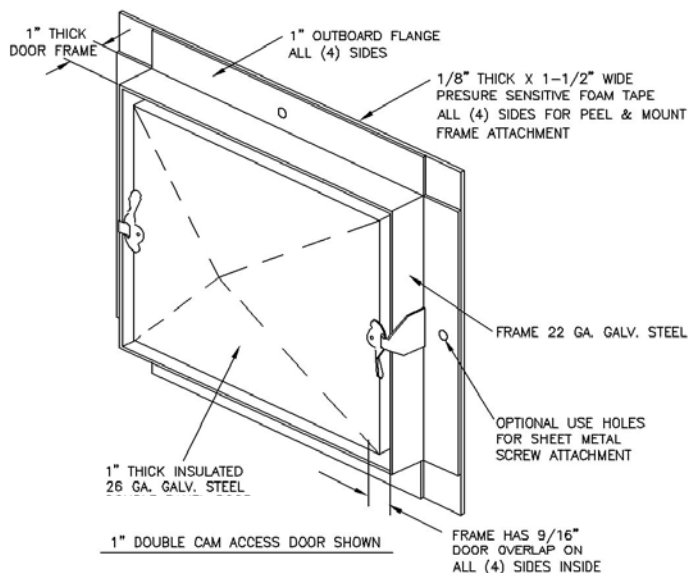

NOTE:

- Hinged doors over 14" x 14" have 3 cam latches. Double cam doors over 14" x 14" have 4 cam latches.
- All models include 1/8" thick x 1/2" wide door-to-frame gasket.

