



LLOYD INDUSTRIES INC.

WWW.FIREDAMPER.COM

ACCESS DOORS



**MODEL:
FRAD-V**


APPLICATION

FRAD-V Access Doors provide an economical way to access components install behind vertical partitions or walls with fire resistance ratings up to 2 hours.

UL 10B FIRE RESISTANCE RATING: 1-1/2 HOUR

STANDARD CONSTRUCTION


FRAME:	16 GAGE STEEL
DOOR PANEL:	20 GAGE STEEL
FINISH:	POWER COAT OR GALV. STEEL
INSULATION:	2" CERAMIC BLANKET BETWEEN INNER AND OUTER DOOR PANELS
HINGE:	CONTINUOUS PIANO TYPE
AUTOMATIC CLOSURE:	COIL SPRING WITH SELF LATCHING SLAM LATCH

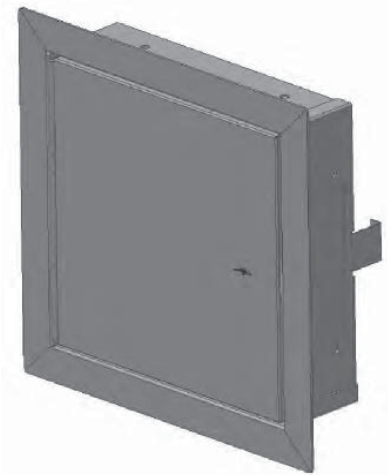


Internal Latch Release	
Minimum Size (WxH)	Maximum Size (WxH)
8"x8"	24"x24"



CLASSIFIED UL US	ACCESS FRAME AND FIRE DOOR ASSEMBLY FIRE RESISTANCE CLASSIFICATION RATING: 1-1/2 HOURS TEMP RISE: 30 MIN -250°F MAX
---	--

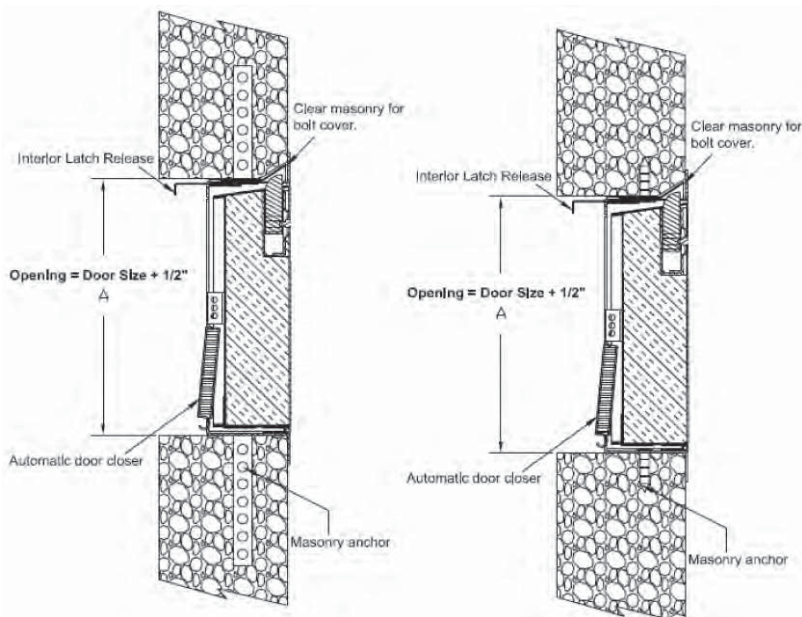

TYPICAL STUD WALL INSTALLATION

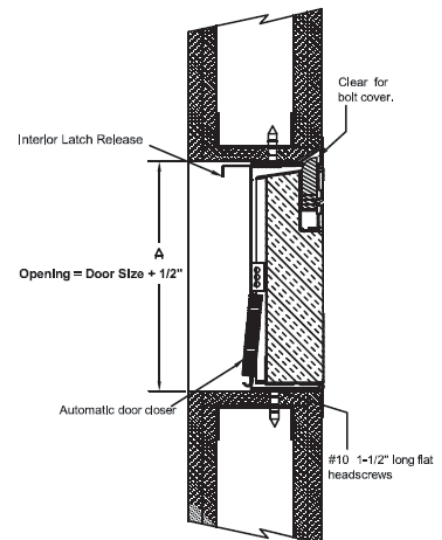

231 Commerce Dr. Montgomeryville, PA 18936
Tel: 215-412-4445 Fax: 215-412-4409
Email: lloydind@firedamper.com

138 Industrial Loop West, Orange Park, FL 32073
Tel: 904-541-1655 Fax: 904-541-1657
Email: lloydind1@bellsouth.net

B1, 4/F., Luen Ming Hing Factory Building
36 Mok Cheong St.,
To Kwa Wan, Kowloon, H. K.
Tel: 852-2760-4188 Fax: 852-2760-4177
Email: tatanlexyim@lloydasia.com

