



FIRE DAMPERS

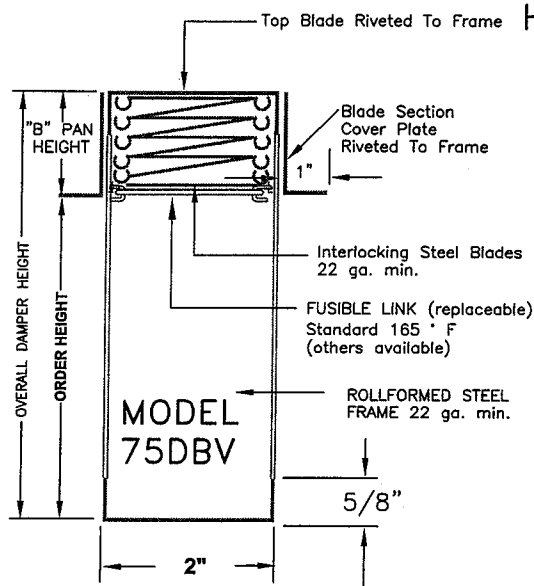


(V) VERTICAL MOUNT

Horizontal & Vertical type
Model 75
U.L. Classified
1-1/2 Hour Rating
DB

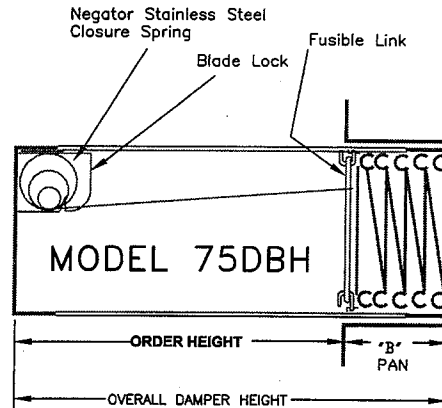


(H) HORIZONTAL MOUNT

HORIZONTAL MOUNTING INCLUDES
STAINLESS STEEL NEGATOR SPRING AND BLADE LOCKS

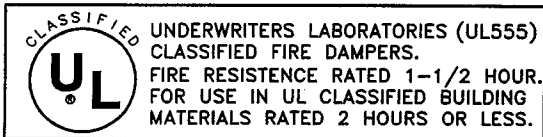


"Thinline" Damper Model with Blades "Out of Air Stream"
Material Standard construction galvanized steel.
Dampers Supplied 1/4" less than Order Width and Height.

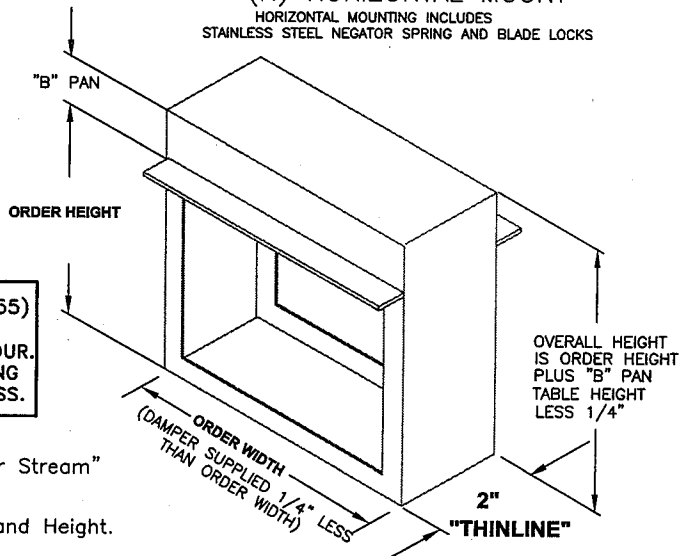

SINGLE SECTION SIZE AVAILABILITY				
	VERTICAL		HORIZONTAL	
	WIDTH X HEIGHT		WIDTH X HEIGHT	
MINIMUM	4"	3"	4"	3"
MAXIMUM SECTION	48"	49"	41"	36"
MAXIMUM DUCT SIZE	48"	49"	41"	36"

JOB NAME: _____
 LOCATION: _____
 ARCHITECT: _____
 ENGINEER: _____
 CONTRACTOR: _____

CLLOYD-6-REV-C



LLOYD INDUSTRIES INC.

231 COMMERCE DRIVE
 MONTGOMERYVILLE, PA. 18936
 TEL: 215-412-4445
 FAX: 215-412-4409
 EMAIL: LLOYDIND@FIREDAMPER.COM

5858 BROADWAY AVE.
 JACKSONVILLE, FL. 32254
 TEL: 904-378-8440
 FAX: 904-378-8441
 EMAIL: LLOYDINDI@BELLSOUTH.NET

WEB SITE: FIREDAMPER.COM