

**SUPCO**  
P/N      Size / Description      Pkg Type Qty

**Quick Disconnects - Insulated**


T1001	12-10 .250 (1/4) female tab	A	15
T1001C	12-10 .250 (1/4) female tab	A	100
T1002	16-14 .250 (1/4) female tab	A	20
T1002C	16-14 .250 (1/4) female tab	A	100
T1003	16-14 .250 (1/4) male tab	B	20
T1003C	16-14 .250 (1/4) male tab	B	100
T1004	12-10 .250 (1/4) male tab	B	15
T1004C	12-10 .250 (1/4) male tab	B	100
T1005	16-14 .250 (1/4) female fully insulated	C	10
T1105C	16-14 .250 (1/4) female fully insulated	C	100
T1006	16-14 .250 (1/4) male fully insulated	D	10
T1106C	16-14 .250 (1/4) male fully insulated	D	100
T1007	18-22 .250 (1/4) female fully insulated	C	10
T1007C	18-22 .250 (1/4) female fully insulated	C	100
T1008	18-22 .250 (1/4) male fully insulated	D	10
T1008C	18-22 .250 (1/4) male fully insulated	D	100
T1009	12-10 .250 (1/4) female fully insulated	C	10
T1009C	12-10 .250 (1/4) female fully insulated	C	100
T1010	12-10 .250 (1/4) male fully insulated	D	10
T1010C	12-10 .250 (1/4) male fully insulated	D	100
T1021	.250 (1/4) double male tab	E	10
T1021C	.250 (1/4) double male tab	E	100
T1022	.250 (1/4) double male tab	F	10
T1002C	.250 (1/4) double male tab	F	100
T1023	.250 (1/4) triple male tab	G	10
T1023C	.250 (1/4) triple male tab	G	100
T1027	16-14 .250 (1/4) male/female p.b.	H	10
T1027C	16-14 .250 (1/4) male/female p.b.	H	100
T1028	22-18 .250 (1/4) male/female p.b.	H	10
T1028C	22-18 .250 (1/4) male/female p.b.	H	100
T1029	12-10 .250 (1/4) male/female p.b.	H	10
T1029C	12-10 .250 (1/4) male/female p.b.	H	100
T2002	16-14 .187 (3/16) female tab	A	20
T2002C	16-14 .187 (3/16) female tab	A	100
T2003	16-14 .187 (3/16) male tab	B	20
T2003C	16-14 .187 (3/16) male tab	B	100
T2004	22-18 .250 (1/4) female tab	A	20
T2004C	22-18 .250 (1/4) female tab	A	100

**Quick Disconnects - Non Insulated**

T1102	16-14 .250 (1/4) female tab	I	20
T1102C	16-14 .250 (1/4) female tab	I	100
T1103	16-14 .250 (1/4) male tab	J	20
T1103C	16-14 .250 (1/4) male tab	J	100
T1104	16-14 .250 (1/4) flag	K	20
T1104C	16-14 .250 (1/4) flag	K	100
T1105	16-14 .187 (3/16) female tab	I	20
T1105C	16-14 .187 (3/16) female tab	I	100
T1106	16-14 .187 (3/16) flag	K	20
T1106C	16-14 .187 (3/16) flag	K	100
T1107	22-18 .110 (7/64) female tab	L	20
T1107C	22-18 .110 (7/64) female tab	L	100
T1108	16-14 .157 (5/32) bullet male	L	20
T1108C	16-14 .157 (5/32) bullet male	L	100
T1109	16-14 .250 (1/4) female tab w/insulation crimp	N	20
T1109C	16-14 .250 (1/4) female tab w/insulation crimp	N	100
T1110	16-14 .157 (5/32) bullet female	M	20
T1110C	16-14 .157 (5/32) bullet female	M	100
T1120	16-14 .312 (5/16) female tab w/insulation crimp	N	10
T1120C	16-14 .312 (5/16) female tab w/insulation crimp	N	100
T1127	16-14 .250 (1/4) male/female p.b.	O	10
T1127C	16-14 .250 (1/4) male/female p.b.	O	100
T2001	22-18 .110 (1/4) female tab	I	20
T2001C	22-18 .110 (1/4) female tab	I	100

**Quick Disconnects - High Temp to 900 F**

T1111	16-14 .250 (1/4) female tab	I	20
T1111C	16-14 .250 (1/4) female tab	I	100
T1112	12-10 .250 (1/4) female tab	I	15
T1112C	12-10 .250 (1/4) female tab	I	100
T1113	16-14 .250 (1/4) female x 90 degree flag	K	20

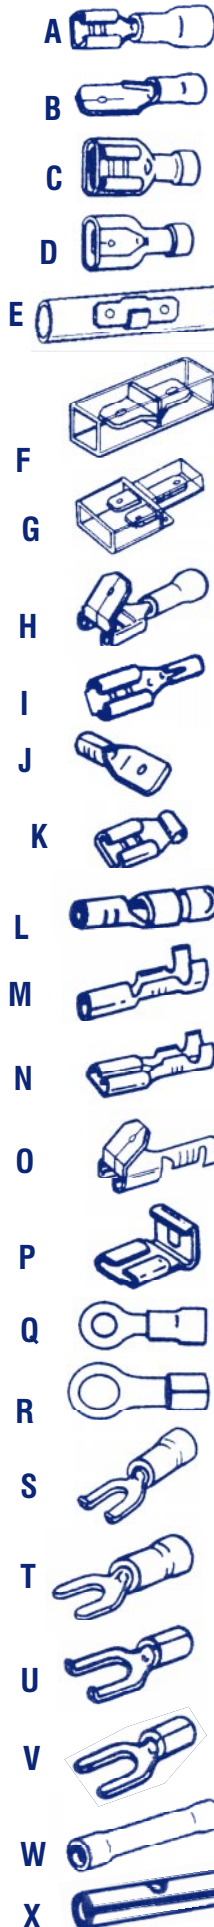

**SUPCO**  
P/N      Size / Description      Pkg Type Qty

T1113C	16-14 .250 (1/4) female x 90 degree flag	K	100
T1114	12-10 .250 (1/4) female x 90 degree flag	P	20
T1114C	12-10 .250 (1/4) female x 90 degree flag	P	100
T2101	16-14 .250 (1/4) female with crimp	N	20
T2101C	16-14 .250 (1/4) female with crimp	N	100

**Rings - Insulated**

T1030	22-18 #6 stud 9/64 I.D.	Q	10
T1030C	22-18 #6 stud 9/64 I.D.	Q	100
T1031	22-18 #8 stud 11/64 I.D.	Q	20
T1031C	22-18 #8 stud 11/64 I.D.	Q	100
T1032	22-18 #10 stud 13/64 I.D.	Q	20
T1032C	22-18 #10 stud 13/64 I.D.	Q	100
T1033	16-14 #8 stud 11/64 I.D.	Q	20
T1033C	16-14 #8 stud 11/64 I.D.	Q	100
T1034	16-14 #10 stud 13/64 I.D.	Q	20
T1034C	16-14 #10 stud 13/64 I.D.	Q	100
T1035	16-14 1/4 stud 17/64 I.D.	Q	15
T1035C	16-14 1/4 stud 17/64 I.D.	Q	100
T1036	12-10 #8 stud 11/64 I.D.	Q	15
T1036C	12-10 #8 stud 11/64 I.D.	Q	100
T1037	12-10 #10 stud 13/64 I.D.	Q	15
T1037C	12-10 #10 stud 13/64 I.D.	Q	100
T1038	12-10 1/4 stud 17/64 I.D.	Q	15
T1038C	12-10 1/4 stud 17/64 I.D.	Q	100
T1039	16-14 3/8 stud 25/64 I.D.	Q	15
T1039C	16-14 3/8 stud 25/64 I.D.	Q	100
T1040	12-10 3/8 stud 25/64 I.D.	Q	15
T1040C	12-10 3/8 stud 25/64 I.D.	Q	100
T2033	16-14 #6 stud 9/64 I.D.	Q	20
T2033C	16-14 #6 stud 9/64 I.D.	Q	100
T2065	#8 1/4 stud 17/64 I.D.	Q	15
T2065C	#8 1/4 stud 17/64 I.D.	Q	100
T2066	#6 1/4 stud 17/64 I.D.	Q	15
T2066C	#6 1/4 stud 17/64 I.D.	Q	100

**Rings - Non Insulated**

T1131	22-18 #8 stud 11/64 I.D.	R	20
T1131C	22-18 #8 stud 11/64 I.D.	R	100
T1133	16-14 #8 stud 11/64 I.D.	R	20
T1133C	16-14 #8 stud 11/64 I.D.	R	100
T1134	16-14 #10 stud 11/64 I.D.	R	20
T1134C	16-14 #10 stud 11/64 I.D.	R	100
T1135	16-14 1/4 stud 17/64 I.D.	R	20
T1135C	16-14 1/4 stud 17/64 I.D.	R	100
T1136	12-10 #8 stud 11/64 I.D.	R	20
T1136C	12-10 #8 stud 11/64 I.D.	R	100
T1137	12-10 #10 stud 13/64 I.D.	R	20
T1137C	12-10 #10 stud 13/64 I.D.	R	100
T1138	12-10 1/4 stud 17/64 I.D.	R	15
T1138C	12-10 1/4 stud 17/64 I.D.	R	100


**Rings - High Temp to 900 F**

T1115	16-14 #10 stud 13/64 I.D.	R	20
T1115C	16-14 #10 stud 13/64 I.D.	R	100
T1116	16-14 1/4 stud 17/64 I.D.	R	20
T1116C	16-14 1/4 stud 17/64 I.D.	R	100
T1117	12-10 #10 stud 13/64 I.D.	R	20
T1117C	12-10 #10 stud 13/64 I.D.	R	100
T1118	12-10 1/4 stud 17/64 I.D.	R	15
T1118C	12-10 1/4 stud 17/64 I.D.	R	100

**Spade Flanged - Insulated**

T1042	22-18 #8 stud 11/64 I.D.	S	20
T1042C	22-18 #8 stud 11/64 I.D.	S	100
T1043	16-14 #8 stud 11/64 I.D.	S	20
T1043C	16-14 #8 stud 11/64 I.D.	S	100
T1044	16-14 #10 stud 13/64 I.D.	S	20
T1044C	16-14 #10 stud 13/64 I.D.	S	100
T1046	12-10 #10 stud 13/64 I.D.	S	15
T1046C	12-10 #10 stud 13/64 I.D.	S	100

SUPCO P/N	Size / Description	Pkg Type	Qty
<b>Spade - Insulated</b>			
T1047	22-18 #8 stud 11/64 I.D.	T	20
T1047C	22-18 #8 stud 11/64 I.D.	T	100
T1048	16-14 #10 stud 13/64 I.D.	T	20
T1048C	16-14 #10 stud 13/64 I.D.	T	100
T1049	12-10 #10 stud 13/64 I.D.	T	15
T1049C	12-10 #10 stud 13/64 I.D.	T	100
T1050	12-10 #8 stud 11/64 I.D.	T	15
T1050C	12-10 #8 stud 11/64 I.D.	T	100
<b>Spade Flanged - Insulated</b>			
T1141	22-18 #8 stud 11/64 I.D.	U	20
T1141C	22-18 #8 stud 11/64 I.D.	U	100
T1142	22-18 #10 stud 13/64 I.D.	U	20
T1142C	22-18 #10 stud 13/64 I.D.	U	100
T1143	16-14 #8 stud 11/64 I.D.	U	20
T1143C	16-14 #8 stud 11/64 I.D.	U	100
T1144	16-14 #10 stud 13/64 I.D.	U	20
T1144C	16-14 #10 stud 13/64 I.D.	U	100
<b>Spade - Non Insulated</b>			
T1145	22-18 #10 stud 13/64 I.D.	V	10
T1145C	22-18 #10 stud 13/64 I.D.	V	100
T1146	16-14 #10 stud 13/64 I.D.	V	10
T1146C	16-14 #10 stud 13/64 I.D.	V	100
T1147	10-12 #10 stud 13/64 I.D.	V	10
T1147C	10-12 #10 stud 13/64 I.D.	V	100
T1147-50	WIRE CNCTR, SM, GRAY		50
<b>Butt Connectors</b>			
T1051	22-18 insulated - red	W	20
T1051C	22-18 insulated - red	W	100
T1052	16-14 insulated - blue	W	20
T1052C	16-14 insulated - blue	W	100
T1053	12-10 insulated - yellow	W	15
T1053C	12-10 insulated - yellow	W	100
T1119	22-18 non insulated	X	20
T1119C	22-18 non insulated	X	100
T2067	# 8 non insulated	X	20
T2067C	#8 non insulated	X	100
T2068	#6 non insulated	X	20
T2068C	#6 non insulated	X	100
T2111	16-14 non insulated	X	20
T2111C	16-14 non insulated	X	100
T2112	12-10 non insulated	X	15
T2112C	12-10 non insulated	X	100
<b>Closed End Connectors</b>			
T1056	22-18 insulated crimp type	Y	20
T1056C	22-18 insulated crimp type	Y	100
T1057	16-14 insulated crimp type	Y	15
T1057C	16-14 insulated crimp type	Y	100
T1058	12-10 insulated crimp type	Y	15
T1058C	12-10 insulated crimp type	Y	100
T1059	#8 insulated crimp type	Y	15
T1059C	#8 insulated crimp type	Y	100
<b>Line Tap Connector</b>			
T1061	22-18 line tap connector	Z	10
T1061C	22-18 line tap connector	Z	100
T1062	16-14 line tap connector	Z	10
T1062C	16-14 line tap connector	Z	100
T1064	12-10 line tap connector	Z	5
T1064C	12-10 line tap connector	Z	100
<b>Line Tap with Disconnect</b>			
T1065	18-14 line taps only	AA	10
T1065C	18-14 line taps only	AA	100

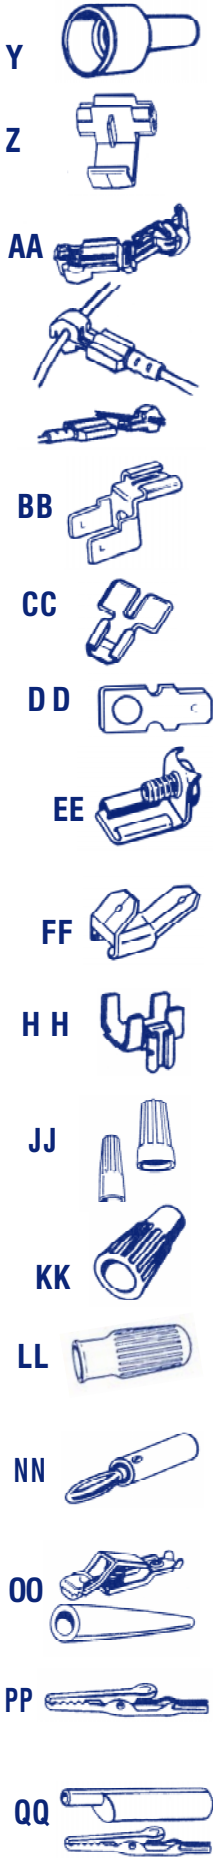

SUPCO P/N	Size / Description	Pkg Type	Qty
<b>Connectors and Adapters</b>			
T1121	.250 (1/4) 2 male x 1 female	BB	10
T1121C	.250 (1/4) 2 male x 1 female	BB	100
T1122	.250 (1/4) 2 male x 1 female	CC	10
T1122C	.250 (1/4) 2 male x 1 female	CC	100
T1123	.250 (1/4) x #10 stud	DD	10
T1123C	.250 (1/4) x #10 stud	DD	100
T1124	.250 (1/4) female x #6 screw	EE	10
T1124C	.250 (1/4) female x #6 screw	EE	100
T1125	.250 (1/4) 2 male x 1 female	FF	10
T1125C	.250 (1/4) 2 male x 1 female	FF	100
T1129	12-8 .250 (1/4) compressor terminal	HH	10
T1129C	12-8 .250 (1/4) compressor terminal	HH	100
T1130	16-14 .250 (1/4) compressor terminal	HH	10
T1130C	16-14 .250 (1/4) compressor terminal	HH	100
<b>Wire Connectors</b>			
T1150	small blue wire nut with spring insert	JJ	20
T1150C	small blue wire nut with spring insert	JJ	100
T1151	medium orange wire nut with spring insert	JJ	15
T1151C	medium orange wire nut with spring insert	JJ	100
T1152	large yellow wire nut with spring insert	JJ	15
T1152C	large yellow wire nut with spring insert	JJ	100
T1153	extra large red wire nut with spring insert	JJ	10
T1153C	extra large red wire nut with spring insert	JJ	100
T1161	small yellow wire nut without insert	JJ	20
T1161C	small yellow wire nut without insert	JJ	100
T1162	medium white wire nut without insert	JJ	20
T1162C	medium white wire nut without insert	JJ	100
T1163	large white wire nut without insert	JJ	20
T1163C	large white wire nut without insert	JJ	100
<b>High Heat Porcelain Wire Connectors (Up To 1800 F)</b>			
T1164	small #1 high heat porcelain wire nut	KK	15
T1164C	small #1 high heat porcelain wire nut	KK	100
T1165	medium #3 high heat porcelain wire nut	KK	15
T1165C	medium #3 high heat porcelain wire nut	KK	100
T2070	large #7 high heat porcelain wire nut	KK	10
T2070C	large #7 high heat porcelain wire nut	KK	100
<b>Scotchlok Electrical Spring Connectors</b>			
T1166	small yellow	LL	15
T1166C	small yellow	LL	100
T1167	medium red	LL	10
T1167C	medium red	LL	100
T1168	large gray	LL	5
T1168L	large gray	LL	50
T1169	extra large blue	LL	5
T1169L	extra large blue	LL	50
<b>Banana Plug</b>			
T1179	includes black and red insulators	NN	1 pair
<b>Heavy Duty Alligator Clips</b>			
T1186	small includes black and red insulators	OO	1 pair
T1187	medium includes black and red insulators	OO	1 pair
T1188	large includes black and red insulators	OO	1 pair
<b>Alligator Clips</b>			
T1191	small standard clips	PP	10
T1192	medium standard clips	PP	5
T1193	medium for use with test leads	PP	5
T1196	small includes black and red insulators	QQ	3 pair
T1197	medium includes black and red insulators	QQ	1 pair

**SEALED UNIT PARTS CO., INC.**  
 PO Box 21, 2230 Landmark Place, Allenwood, NJ USA  
 732-223-6644 • Fax 732-223-1617  
 www.supco.com • info@supco.com