



EXTRUDED ALUMINUM LOUVER


MODEL: 4-DL

4" DEPTH DRAINABLE LOUVER
Channel Frame



APPLICATION

The 4-DL is a 4" depth drainable / weather louver for protection of high air intake velocities and exhaust in building exterior walls. The structure of the 4-DL incorporates horizontal blades to channel water to the jambs which directs the water escape at the sill.

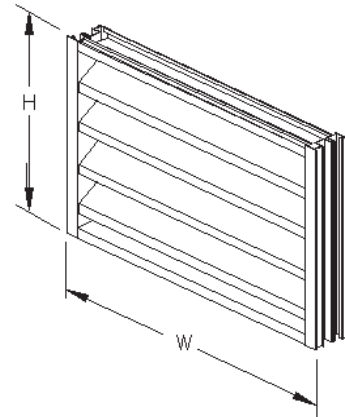



SPECIFICATIONS

- Frame:** 0.081 thick extruded aluminum
6063-T5 mill finish
- Blade:** 0.081 thick extruded aluminum
6063-T5 mill finish
- Blade Spacing:** 3-1/4" centers except at head and sills
- Fasteners:** 10" x 3/4" tek screws
- Blade Angle:** 45°
- Min. Height:** 8"
- Max. Single Sec.:** Consult factory for maximum size
- Screen:** Bird screen 1/2" x 1/2" galvanized steel


OPTIONS

- Insect Screen 18" x 16" mesh Aluminum
- Bird Screen 1/2" x 1/2" Aluminum

- Finish:** Clear Anodized
- Color Anodized
- Powder Coat Paint
- Baked Enamel Paint

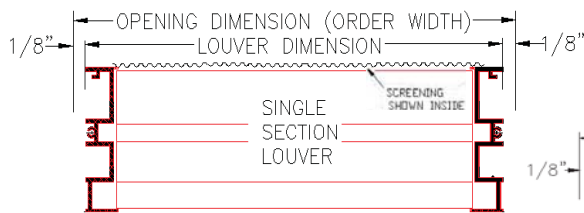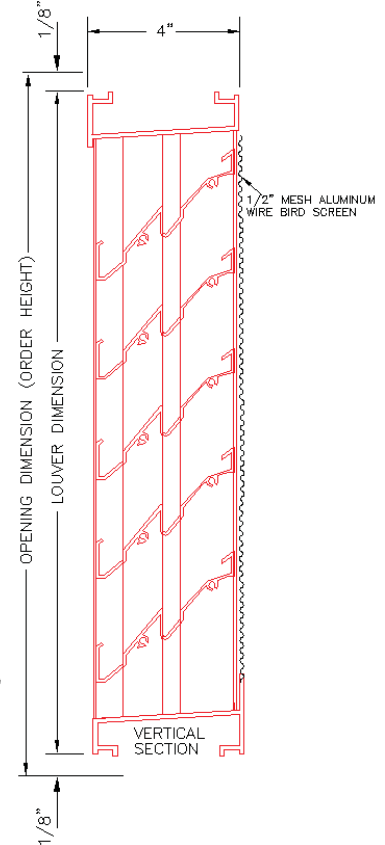

HORIZONTAL SECTION

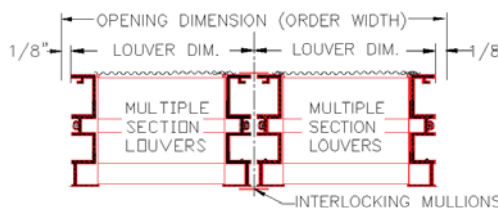



EXTRUDED ALUMINUM LOUVER

MODEL: 4-DLF

**4" DEPTH DRAINABLE FLANGED
FRAME LOUVER**



APPLICATION

The 4-DLF is a 4" depth drainable / weather flanged frame louver for protection of high air intake velocities and exhaust in building exterior walls. The blade design for 4-DLF has a better performance to channel water to the jams which directs the water escape at the sill.




SPECIFICATIONS

- Frame:** 0.081 thick extruded aluminum
6063-T5 mill finish
- Blade:** 0.081 thick extruded aluminum
6063-T5 mill finish
- Blade Spacing:** 3-1/4" centers except at head and sills
- Fasteners:** 10" x 3/4" tek screws
- Blade Angle:** 45°
- Min. Height:** 8"
- Max. Single Sec.:** Consult factory for maximum size
- Screen:** Bird screen 1/2" x 1/2" galvanized steel


OPTIONS

- Insect Screen 18" x 16" mesh aluminum
- Bird Screen 1/2" x 1/2" aluminum

- Finish:** Clear Anodized
- Color Anodized
- Powder Coat Paint
- Baked Enamel Paint

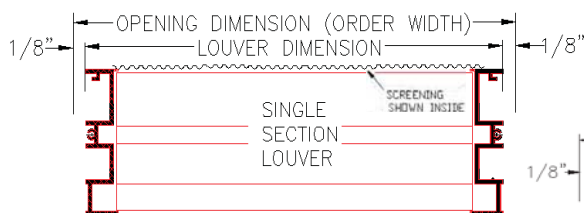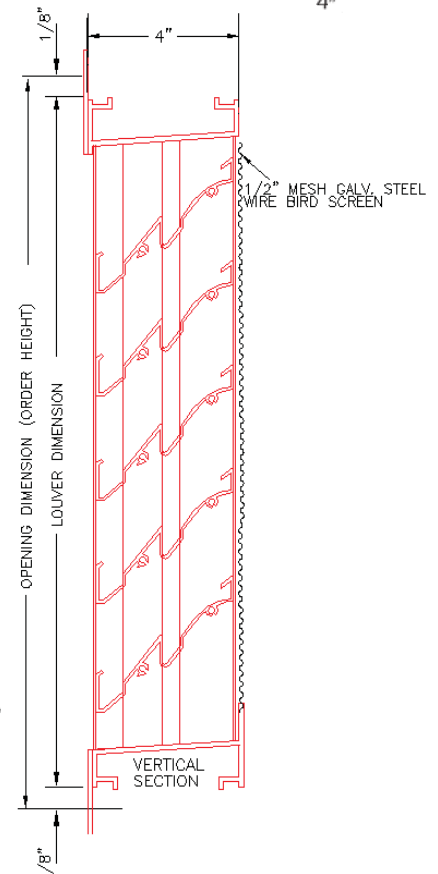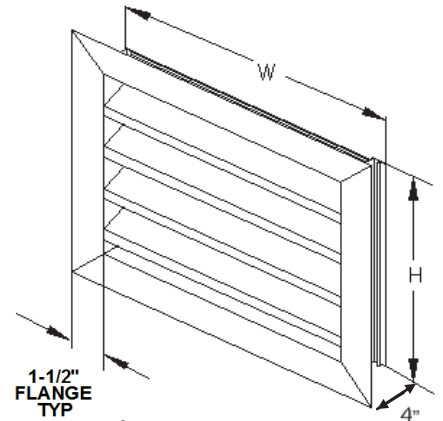

HORIZONTAL SECTION

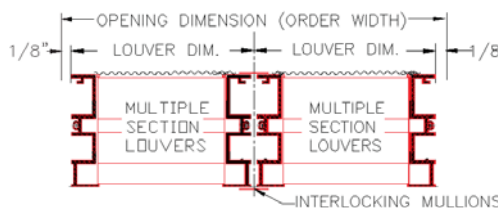



EXTRUDED ALUMINUM LOUVER


MODEL: 4-DL 33°

4" DEPTH DRAINABLE LOUVER



APPLICATION

The 4-DL 33° is a 4" depth drainable / weather louver designed for protection of higher air intake velocities and exhaust openings in building exterior walls. The blade design for the 4-DL 33° has a better performance to channel water to the jambs which directs the water escape at the sill.

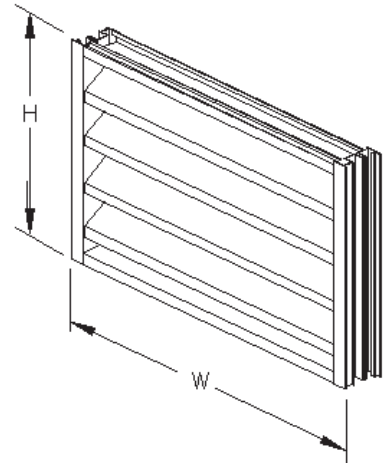



SPECIFICATIONS

- Frame:** 0.081 thick extruded aluminum
6063-T5 mill finish
- Blade:** 0.081 thick extruded aluminum
6063-T5 mill finish
- Blade Spacing:** 3-1/4" centers except at head and sills
- Fasteners:** 10" x 3/4" tek screws
- Blade Angle:** 33°
- Min. Height:** 8"
- Max. Single Sec.:** Consult factory for maximum size
- Screen:** Bird screen 1/2" x 1/2" galvanized steel


OPTIONS

- Insect Screen 18" x 16" mesh aluminum
- Bird Screen 1/2" x 1/2" aluminum

- Finish:** Clear Anodized
- Color Anodized
- Powder Coat Paint
- Baked Enamel Paint

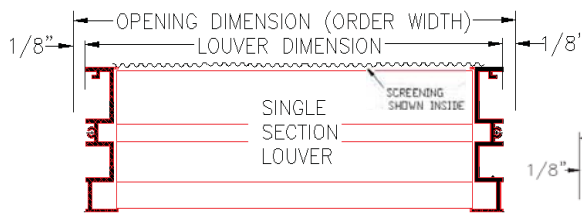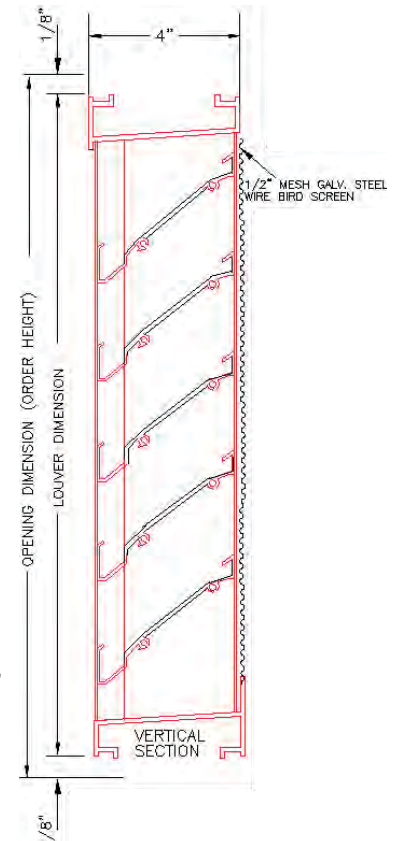

HORIZONTAL SECTION

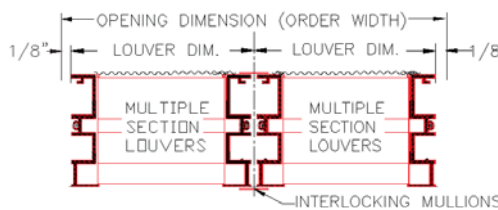



EXTRUDED ALUMINUM LOUVER




MODEL: 4-DLF 33°

**4" DEPTH DRAINABLE FLANGED
FRAME LOUVER**

APPLICATION

The 4-DLF 33° is a 4" depth drainable / weather flanged frame louver designed for protection of higher air intake velocities and exhaust openings in building exterior walls. The blade design for the 4-DLF 33° has a better performance to channel water to the jambs which directs the water escape at the sill.

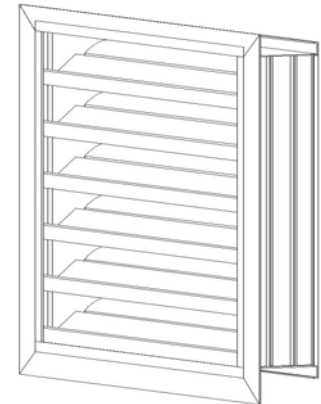



SPECIFICATIONS

- Frame:** 0.081 thick extruded aluminum
6063-T5 mill finish
- Blade:** 0.081 thick extruded aluminum
6063-T5 mill finish
- Blade Spacing:** 3-1/4" centers except at head and sills
- Fasteners:** 10" x 3/4" tek screws
- Blade Angle:** 33°
- Min. Height:** 8"
- Max. Single Sec.:** Consult factory for maximum size
- Screen:** Bird screen 1/2" x 1/2" galvanized steel

OPTIONS

- Insect Screen 18" x 16" mesh aluminum
- Bird Screen 1/2" x 1/2" aluminum

- Finish:** Clear Anodized
- Color Anodized
- Powder Coat Paint
- Baked Enamel Paint

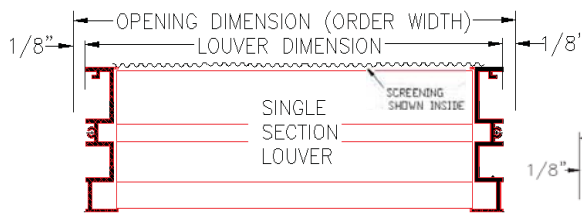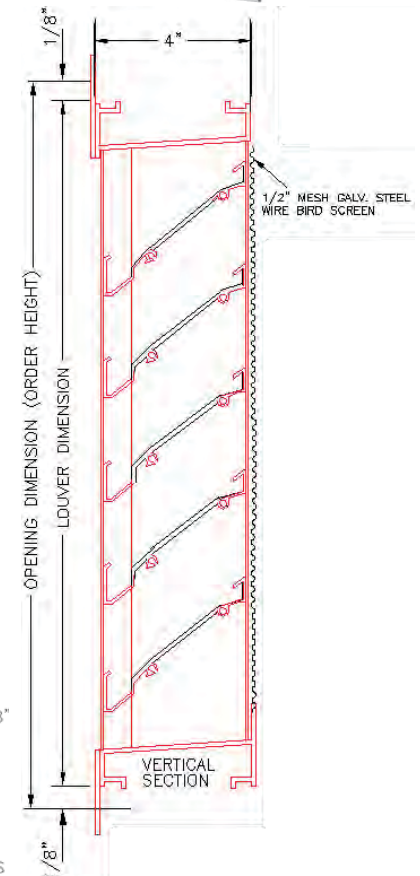

HORIZONTAL SECTION

