
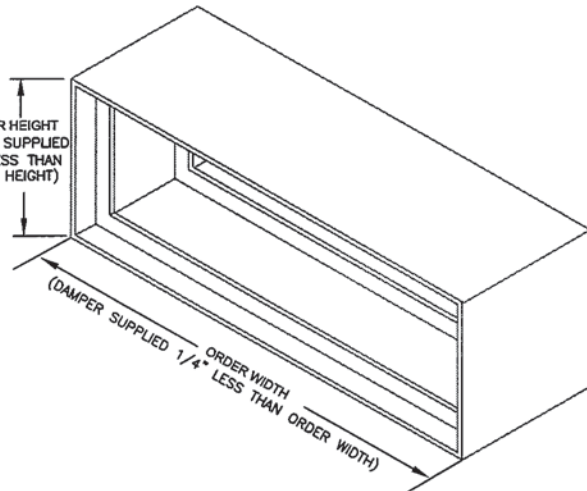



# DYNAMIC FIRE DOORS

Vertical  
Model 75  
U.L. Classified  
3 Hour Rating

type  
**L-DY**

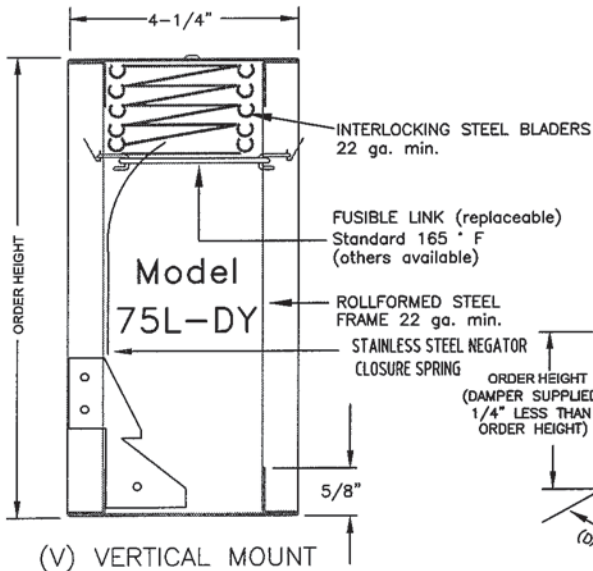

LOOK FOR THESE LABELS

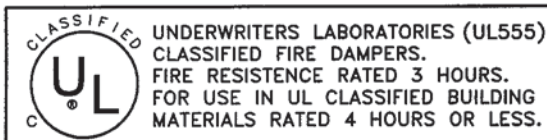

Damper Model with Blades "In Air Stream".  
Standard construction material galvanized steel.  
Dampers supplied 1/4" less than Order Width and Height.

MATERIALS: STANDARD CONSTRUCTION-GALVANIZED STEEL SPECIFICATION FOR ALL MATERIAL PER UNDERWRITERS LABORATORIES STANDARD FOR SAFETY UL555.  
UNDERWRITERS LABORATORIES LABELED FOR USE IN SIZES NO LARGER THAN SHOWN IN UL BUILDING MATERIALS LIST.  
DYNAMIC FIRE DAMPERS:  
BI-DIRECTIONAL  
2400 FPM MAXIMUM VELOCITY  
4.0 WG MAXIMUM STATIC PRESSURE  
FEATURE VERTICAL CLOSURE SPRING OPERATION UNDER AIRFLOW IN HVAC SYSTEMS WHERE FANS REMAIN RUNNING IN FIRE AND SMOKE CONTROL.  
DYNAMIC FIRE DAMPERS BEAR A LABEL ATTESTING TO AIRFLOW AND MAXIMUM STATIC PRESSURE LIMITS.

| SINGLE SECTION SIZE AVAILABILITY |                |     |                |               | JOB NAME: _____<br>LOCATION: _____<br>ARCHITECT: _____<br>ENGINEER: _____<br>CONTRACTOR: _____ |
|----------------------------------|----------------|-----|----------------|---------------|--|
| MINIMUM                          | VERTICAL       |     | HORIZONTAL     |               |  |
|                                  | WIDTH X HEIGHT |     | WIDTH X HEIGHT |               |  |
|                                  | 4"             | 4"  | NOT AVAILABLE  | NOT AVAILABLE |  |
| MAXIMUM                          | 24"            | 24" | NOT AVAILABLE  | NOT AVAILABLE |  |
|                                  |                |     |                |               |  |

CLLOYD-12-REV-C



## LLOYD INDUSTRIES INC.

231 COMMERCE DRIVE  
MONTGOMERYVILLE, PA. 18936  
TEL: 215-412-4445  
FAX: 215-412-4409  
EMAIL: LLOYDIND@FIREDAMPER.COM

5858 BROADWAY AVE.  
JACKSONVILLE, FL. 32254  
TEL: 904-378-8440  
FAX: 904-378-8441  
EMAIL: LLOYDINDI@BELLSOUTH.NET

WEB SITE: FIREDAMPER.COM