



## FIRE DAMPER

**MODEL:**  
**75N (3 HR rating)**



### APPLICATION

The model 75N is a thin line fire damper. It is approved for use in walls and partitions with fire resistance ratings less than 3 hours. This model carries a 3 hour UL fire damper label.

### RATING:

**UL CLASSIFIED:** UL 555 Fire Resistance Rating  
Fire resistance rated 3 Hours  
Partitions materials rated 4 Hours or less

### Standard Construction

Frame: 22 Ga. galvanized steel  
Blade: 22 Ga. galvanized steel  
Closure Spring: Stainless steel  
Fusible Link: 165°F  
Mounting: Vertical

### Optional Material:

Type 316 stainless steel

Model 75N meets the requirements for fire dampers established by:


**CSFM California State Fire Marshal  
Fire Damper Listing (#3225-1417:102)**



	Single Section		Multiple Section
	Minimum Size (WxH)	Maximum Size (WxH)	Maximum Size (WxH)
Vertical	4"x4"	48"x49"	96"x98"
Horizontal	NA	NA	NA

**WebREPS**  
800-810-3280

Model: 75N  
(Vertical Mount)

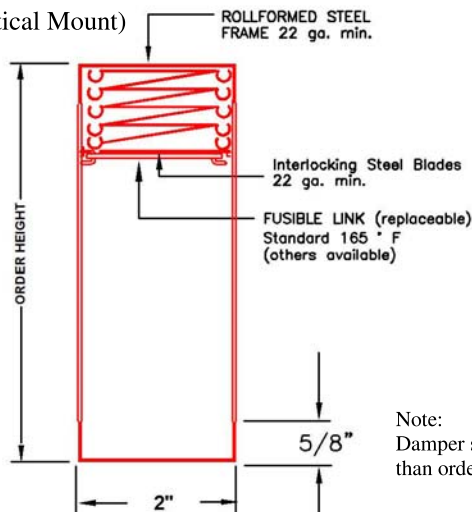

ORDER HEIGHT DAMPER SUPPLIED 1/4" LESS THAN ORDER HEIGHT

ORDER WIDTH DAMPER SUPPLIED 1/4" LESS THAN ORDER WIDTH

2" "THINLINE"

Note:  
Damper supplied 1/4" less than order Width and Height.

231 Commerce Dr. Montgomeryville, PA 18936  
Tel: 215-412-4445 Fax: 215-412-4409  
Email: lloydind@firedamper.com

138 Industrial Loop West, Orange Park, FL 32073  
Tel: 904-541-1655 Fax: 904-541-1657  
Email: lloydind1@firedamper.com

B1, 4/F., Luen Ming Hing Factory Building  
36 Mok Cheong St.,  
To Kwa Wan, Kowloon, H. K.  
Tel: 852-2760-4188 Fax: 852-2760-4177  
Email: tatanlexyim@lloydasia.com



Website: www.firedamper.com