


CEILING RADIATION DAMPERS

MODEL 50-4X type
UL Classified
3 Hour Rating

CRD

"RECTANGULAR"

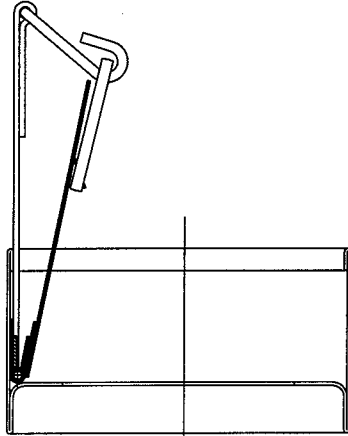


CRD SHOWN IN OPENED POSITION

1. UL LISTED LINK (165°F STANDARD)(MAX 212°F)
2. BLADE 22 (.853mm) GA. GALV. STEEL
4. ROLL-FORMED FRAME 22 (.853 MM) GA. GALV. STEEL
5. STEEL DUCT DROP (BY OTHERS).

NOTES:


1. MAXIMUM SIZE 4" X 12"
MINIMUM SIZE 4" X 8"
2. AVAILABLE IN STAINLESS STEEL

NOTE: CERAMIC INSULATION IS NOT UL REQUIRED
ON LLOYD INDUSTRIES DAMPERS WITH AREAS
LESS THAN 80 SQUARE INCHES.

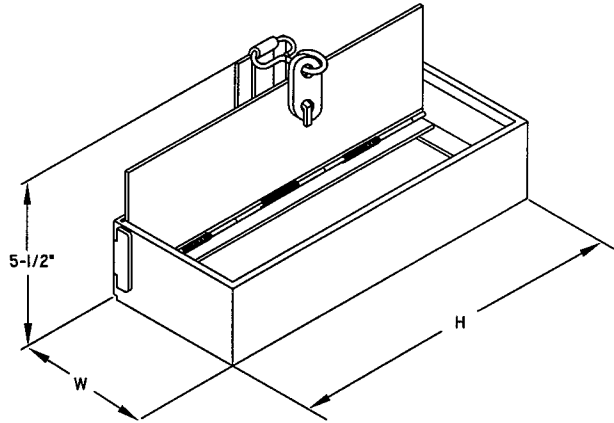

MODEL CRD50-4X
SINGLE BLADE DAMPER


LOOK FOR THESE LABELS

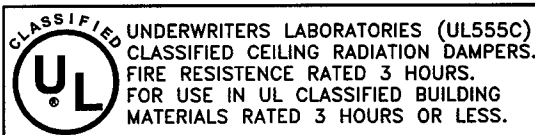

NOTE:
DAMPERS WILL BE PROVIDED
ORDER WIDTH LESS 1/4" X ORDER HEIGHT LESS 1/4"

JOB NAME: _____
LOCATION: _____
ARCHITECT: _____
ENGINEER: _____
CONTRACTOR: _____

10268-REV-B



LLOYD INDUSTRIES INC.

231 COMMERCE DRIVE
MONTGOMERYVILLE, PA. 18936
TEL: 215-412-4445
FAX: 215-412-4409
EMAIL: LLOYDIND@FIREDAMPER.COM

5858 BROADWAY AVE.
JACKSONVILLE, FL. 32254
TEL: 904-378-8440
FAX: 904-378-8441
EMAIL: LLOYDINDI@BELLSOUTH.NET

WEB SITE: FIREDAMPER.COM