


CEILING RADIATION DAMPERS

MODEL 50-6X type
UL Classified
3 Hour Rating **CRD**
"RECTANGULAR"

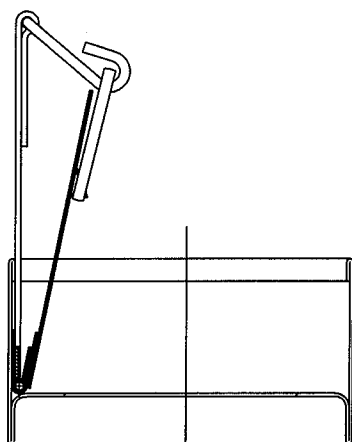


CRD SHOWN IN OPENED POSITION

1. UL LISTED LINK (165°F STANDARD)(MAX 212°F)
2. BLADE 22 (.853mm) GA. GALV. STEEL
4. ROLL-FORMED FRAME 22 (.853 MM) GA. GALV. STEEL
5. STEEL DUCT DROP (BY OTHERS).

NOTES:

1. MAXIMUM SIZE 6" X 12"
MINIMUM SIZE 6" X 8"
2. AVAILABLE IN STAINLESS STEEL

NOTE: CERAMIC INSULATION IS NOT UL REQUIRED
ON LLOYD INDUSTRIES DAMPERS WITH AREAS
LESS THAN 80 SQUARE INCHES.

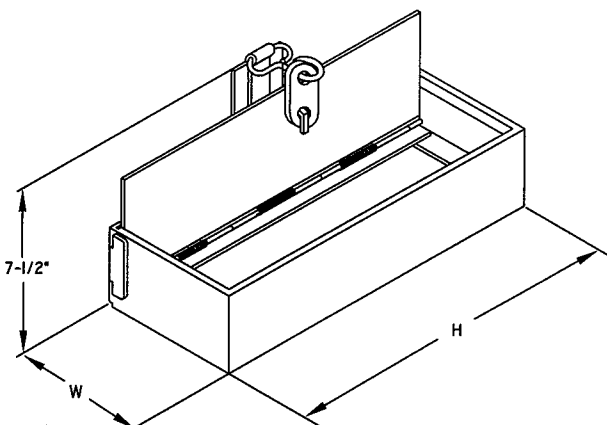

MODEL CRD50-6X
SINGLE BLADE DAMPER

LOOK FOR THESE LABELS




UNDERWRITERS LABORATORIES (UL555C)
CLASSIFIED CEILING RADIATION DAMPERS.
FIRE RESISTENCE RATED 3 HOURS.
FOR USE IN UL CLASSIFIED BUILDING
MATERIALS RATED 3 HOURS OR LESS.

NOTE:
DAMPERS WILL BE PROVIDED
ORDER WIDTH LESS 1/4" X ORDER HEIGHT LESS 1/4"

JOB NAME: _____
LOCATION: _____
ARCHITECT: _____
ENGINEER: _____
CONTRACTOR: _____

10535-REV-A



LLOYD INDUSTRIES INC.

231 COMMERCE DRIVE
MONTGOMERYVILLE, PA. 18936

TEL: 215-412-4445

FAX: 215-412-4409

EMAIL: LLOYDIND@FIREDAMPER.COM

5858 BROADWAY AVE.
JACKSONVILLE, FL. 32254

TEL: 904-378-8440

FAX: 904-378-8441

EMAIL: LLOYDINDI@BELLSOUTH.NET

WEB SITE: FIREDAMPER.COM