


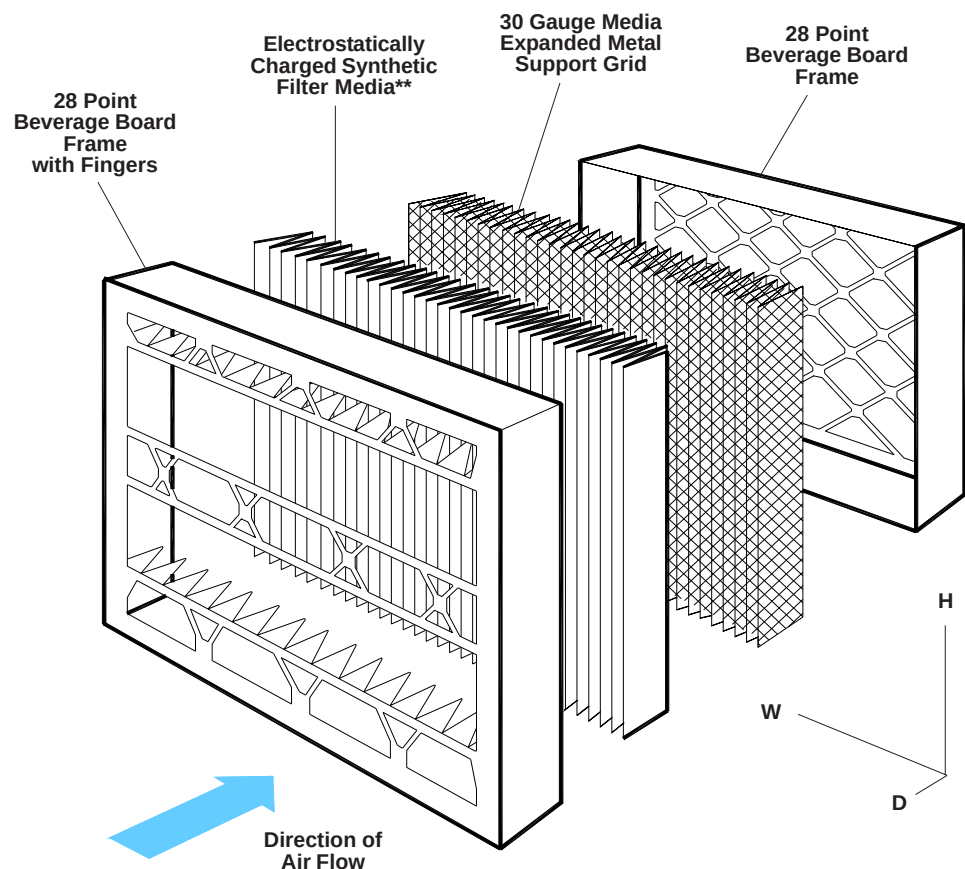

Notes:

Space Baron Research Products "Space-Gard 2200"* & Space-Gard 2400"* Residential Air Cleaner replacement filters are 5" deep pleated Quality Pleats that are specifically designed to replace other comparably sized ducted air products. Space Baron Research Products "Space-Gard 2200 & 2400"* are available in 3 efficiencies including: MERV 8, MERV 11, and Carbon medias.

Performance Data -

Space Baron Research Products "Space-Gard 2200 & 2400"*

Product Code	ASHRAE 52.2 - 1999				Initial Resistance "w.g.		Final Resistance "w.g.	
	MERV Value	E1 %	E2 %	E3 %				
					@ 1032 cfm	@ 1000cfm	@ 1032 cfm	@1000cfm
SBRP2240	8	n/a	n/a	n/a	0.08	-	.50	-
SBRP22MQP	11	n/a	n/a	n/a	0.1	-	.50	-
SBRP22OB	8	n/a	n/a	n/a	0.07	-	.50	-
SBRP2440	8	n/a	n/a	n/a	-	0.09	-	.50
SBRP24MQP	11	n/a	n/a	n/a	-	0.11	-	.50
SBRP24OB	8	n/a	n/a	n/a	-	0.06	-	.50

Part Number Guide

Product Code	Description	Nominal Dimensions	Actual Frame Dimensions
SBRP2240	Type 40 - MERV 8	20" x 25" x 6"	19.75" x 24.25" x 6"
SBRP2440	Type 40 - MERV 8	16" X 27" x 6"	15.5" x 27" x 6"
SBRP22MQP	MQP - MERV 11	20" x 25" x 6"	19.75" x 24.25" x 6"
SBRP24MQP	MQP - MERV 11	16" X 27" x 6"	15.5" x 27" x 6"
SBRP22OB	Odor Ban - MERV 8	20" x 25" x 6"	19.75" x 24.25" x 6"
SBRP24OB	Odor Ban - MERV 8	16" X 27" x 6"	15.5" x 27" x 6"

*Trade names and company names are used for identification purposes only.

Characteristics	Space Baron Research Products “Space-Gard” [™] Series	 QUALITY FILTERS, INC. THINK SIMPLE. THINK SMART. THINK QUALITY. 23351 Grissom Drive Robertsdale, AL 36567 www.QualityFilters.com Phone: (251) 947-2400 Order Fax: (251) 947-2499 Sales Fax: (251) 947-7948			
Filter Media-Particulate	100% synthetic gradient media, electrostatically charged	Quality Filters Space Baron Research Products “Space-Gard”[™] Series DR JJS CK JH Date 28 Sep 07 Date 28 Sep 07 Dwg No. Q-110032 Revision			
Filter Media-Odor Ban	Fine carbon powder bonded to lofted polyester media				
Filter Support Grid	30 gauge galvanized expanded metal grid				
Frame	Moisture resistant 28 point beverage board				
Assembly Technique	Media pack totally bonded to frame				
Max. Temperature	180°F (82°C) continuous service, Peaks 225°F (107°C)				
Max. Humidity	Resistant to 100% R.H.				