


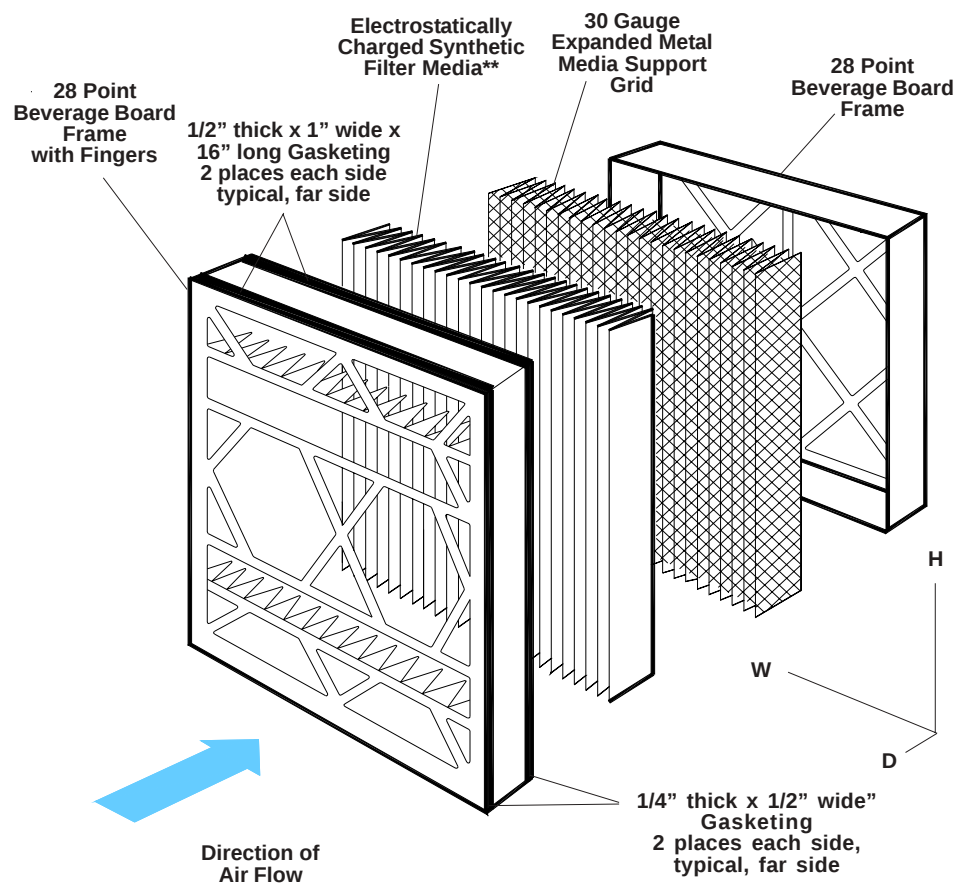

Notes:

Space Baron White Rodgers* "F825" Series Residential Air Cleaner replacement filters are 5" deep pleated Quality Pleats that are specifically designed to replace other comparably sized ducted air products. Space Baron White Rodgers* "F825" Series are available in 3 efficiencies including: MERV 8, MERV 11, and Carbon medias.

Performance Data - Space Baron "White Rodgers F825"* Series

Product Code	ASHRAE 52.2 - 1999				Initial Resistance "w.g."		Final Resistance "w.g."	
	MERV Value	E1 %	E2 %	E3 %				
					@ 836 cfm	@ 1032 cfm	@ 836 cfm	@ 1032 cfm
SBWR4840	8	n/a	n/a	n/a	0.08	-	.50	-
SBWR48MQP	11	n/a	n/a	n/a	0.1	-	.50	-
SBWR48OB**	8	n/a	n/a	n/a	0.07	-	.50	-
SBWR4940	8	n/a	n/a	n/a	-	0.08	-	.50
SBWR49MQP	11	n/a	n/a	n/a	-	0.1	-	.50
SBWR49OB**	8	n/a	n/a	n/a	-	0.07	-	.50

Part Number Guide

Product Code	Description	Nominal Dimensions	Actual Frame Dimensions w/o Gasketing
SBWR4840	Type 40 - MERV 8	16" x 26" x 5"	15.75" x 24.75" x 4.25"
SBWR4940	Type 40 - MERV 8	20" x 26" x 5"	19.75" x 24.75" x 4.25"
SBWR48MQP	MQP - MERV 11	16" x 26" x 5"	15.75" x 24.75" x 4.25"
SBWR49MQP	MQP - MERV 11	20" x 26" x 5"	19.75" x 24.75" x 4.25"
SBWR48OB	Odor Ban - MERV 8	16" x 26" x 5"	15.75" x 24.75" x 4.25"
SBWR49OB	Odor Ban - MERV 8	20" x 26" x 5"	19.75" x 24.75" x 4.25"

*Trade names and company names are used for identification purposes only.

Characteristics	Space Baron White Rodgers* “F825” Series	 QUALITYFILTERS, INC. THINKSIMPLE. THINKSMART. THINKQUALITY. 23351 Grissom Drive Robertsdale, AL 36567 www.QualityFilters.com Phone: (251) 947-2400 Order Fax: (251) 947-2499 Sales Fax: (251) 947-7948			
Filter Media - Particulate	100% synthetic gradient media, electrostatically charged	Quality Filters Space Baron White Rodgers* “F825” Series			
**Filter Media - Odor Ban	Fine carbon powder bonded to lofted polyester media				
Filter Support Grid	30 gauge galvanized expanded metal grid				
Frame	Moisture resistant 28 point beverage board				
Gasketing	Closed cell urethane foam gasketing				
Assembly Technique	Media pack totally bonded to frame				
Max. Temperature	180°F (82°C) continuous service, Peaks 225°F (107°C)	DR JJS	Date 28 Sep 07	Dwg No. Q-110033	Revision
Max. Humidity	Resistant to 100% R.H.	CK JH	Date 28 Sep 07		