



REF-METER-OCTA-PLUS

Automatic charging module available for the REF-METER-OCTA for the efficient and programmable filling of refrigerant and air conditioning systems. It is suitable for all refrigerants. Through a visual and an acoustic signal the exact programmed filling weight is achieved.

Technical Data:


Charging Port:	1/4" SAE
Max. Valve operating pressure:	500 psi, 34 bar
Power supply:	4 x 1,5 V AA Alkaline Batteries
Battery lifetime:	> 200 hours
Materials:	Valve Body Brass, Seal Neoprene-W
Operating temperature:	0 °C to 50 °C / 32 °F to 122 °F
Weight:	1.2 lbs with batteries
Dimensions:	8.6 x 6.6 x 1.9 inch

Part No. 4681823



REF-METER-OCTA-PLUS

REF-METER-OCTA-KIT

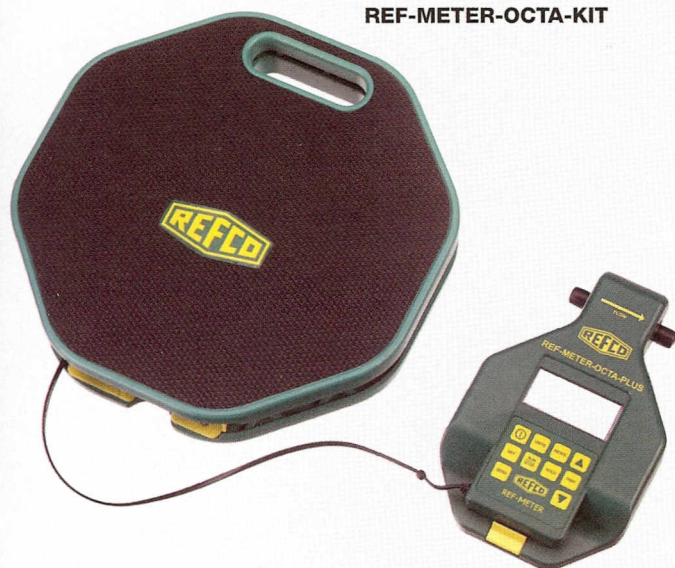

REF-METER-OCTA-KIT

Combination kit including REF-METER-OCTA and REF-METER-OCTA-PLUS

Part No. 4681989