

# SUBMITTAL SHEET



N° PSIL

## Perforated Face Supply Diffuser with Molded Fiberglass Back Panel Fixed face - directional louvers deflector




**Material:** Molded fiberglass back with aluminum foil vapor barrier scored for 6" to 14" D. Steel perforated face with 3/16" diam. holes on 1/4" staggered centers, affords 53% free area.

**Finish:** Powder paint coating - white.  
**Air pattern:** Fixed horizontal 360° diffusion.  
**Mounting:** Lay-in T-bar ceiling.

**PSIL**

Fiberglass back complies with  
A.S.T.M. E84 flame and smoke test.  
Scored for collar sizes up to 14" D.  
 R4                       R6

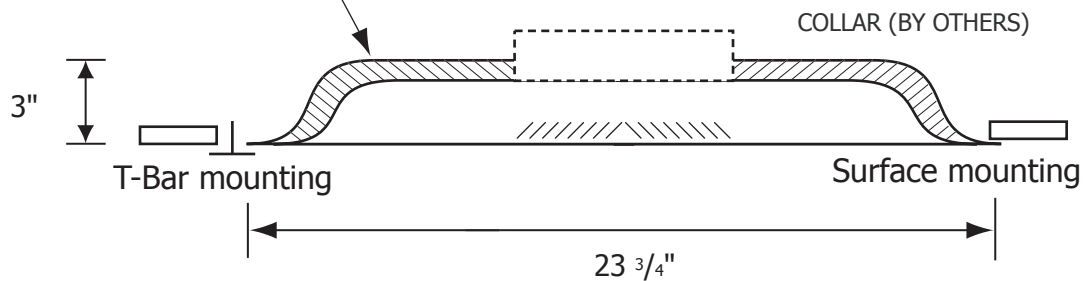

|             |       |
|-------------|-------|
| Job:        | _____ |
| Architect:  | _____ |
| Engineer:   | _____ |
| Contractor: | _____ |