


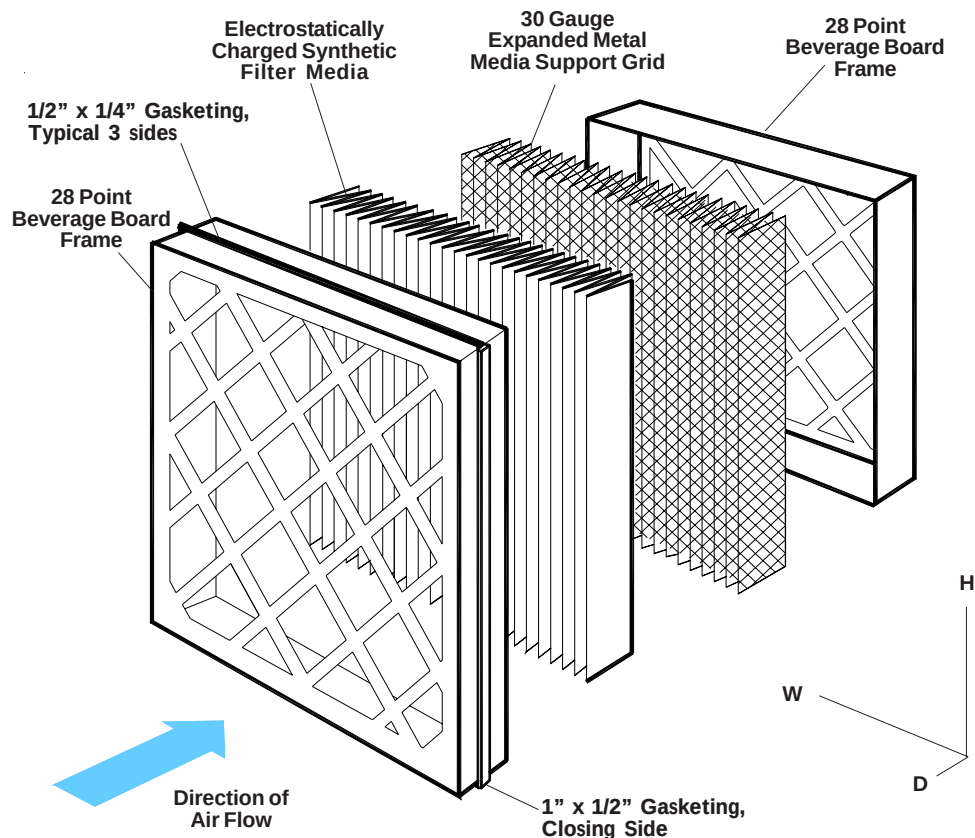

Notes:

Space Baron Trane Perfect Fit* Series Residential Air Cleaner replacement filters are 5" deep pleated Quality Pleats that are specifically designed to replace other comparably sized ducted air products. Space Baron Trane Perfect Fit* Series is available in 3 efficiencies including: MERV 8, MERV 11, and Carbon medias.

Performance Data - Space Baron Trane Perfect Fit* Series

Product Code	ASHRAE 52.2 - 1999				Initial Resistance "w.g."		Final Resistance "w.g."	
	MERV Value	E1 %	E2 %	E3 %	@ ____ cfm		@ ____ cfm	
					@ ____ cfm	@ ____ cfm	@ ____ cfm	@ ____ cfm
SBPFH26M40	8	n/a	n/a	n/a	-	-	-	-
SBPFH26MQP	11	n/a	n/a	n/a	-	-	-	-
SBPFH26MOB	8	n/a	n/a	n/a	-	-	-	-

Part Number Guide

Product Code	Description	Nominal Dimensions	Replaces Trane Perfect Fit*
SBPFH26M40	Type 40 - MERV 8	26" x 21" x 5"	"BAYFTHA26M"*
SBPFR17M40	Type 40 - MERV 8	17.5" x 27" x 5"	"BAYFTFR17M"*
SBPFR21M40	Type 40 - MERV 8	21" x 27" x 5"	"BAYFTFR21M"*
SBPFH21M40	Type 40 - MERV 8	21.5" x 21" x 5"	"BAYFTHA21M"*
SBPFH23M40	Type 40 - MERV 8	23.2" x 20.1" x 5"	"BAYFTHA23M"*
SBPFR24M40	Type 40 - MERV 8	24" x 26" x 5"	"BAYFTFR24M"*
SBPFH26MQP	MQP - MERV 11	26" x 21" x 5"	"BAYFTHA26M"*
SBPFR17MQP	MQP - MERV 11	17.5" x 27" x 5"	"BAYFTFR17M"*
SBPFR21MQP	MQP - MERV 11	21" x 27" x 5"	"BAYFTFR21M"*
SBPFH21MQP	MQP - MERV 11	21.5" x 21" x 5"	"BAYFTHA21M"*
SBPFH23MQP	MQP - MERV 11	23.2" x 20.1" x 5"	"BAYFTHA23M"*
SBPFR24MQP	MQP - MERV 11	24" x 26" x 5"	"BAYFTFR24M"*
SBPFH26MOB	Odor Ban - MERV 8	26" x 21" x 5"	"BAYFTHA26M"*
SBPFR17MOB	Odor Ban - MERV 8	17.5" x 27" x 5"	"BAYFTFR17M"*
SBPFR21MOB	Odor Ban - MERV 8	21" x 27" x 5"	"BAYFTFR21M"*
SBPFH21MOB	Odor Ban - MERV 8	21.5" x 21" x 5"	"BAYFTHA21M"*
SBPFH23MOB	Odor Ban - MERV 8	23.2" x 20.1" x 5"	"BAYFTHA23M"*
SBPFR24MOB	Odor Ban - MERV 8	24" x 26" x 5"	"BAYFTFR24M"*

*Trade names and company names are used for identification purposes only.

Characteristics	Space Baron Trane Perfect Fit* Series			
Filter Media - Particulate	100% synthetic gradient media, electrostatically charged			
Filter Media - Odor Ban	Fine carbon powder bonded to lofted polyester media			
Filter Support Grid	30 gauge galvanized expanded metal grid			
Frame	Moisture resistant 28 point beverage board			
Assembly Technique	Media pack totally bonded to frame			
Max. Temperature	180°F (82°C) continuous service, Peaks 225°F (107°C)			
Max. Humidity	Resistant to 100% R.H.			
		DR JJS	Date 28 Sep 07	Dwg No. Q-110036 Revision
		CK JH	Date 28 Sep 07	



QUALITYFILTERS, INC.
THINKSIMPLE. THINKSMART. THINKQUALITY.

23351 Grissom Drive
Robertsdale, AL 36567
www.QualityFilters.com

Phone: (251) 947-2400
Order Fax: (251) 947-2499
Sales Fax: (251) 947-7948

Quality Filters Space Baron Trane Perfect Fit* Series